


# VARIABLE FREQUENCY DRIVE PACKAGE SYSTEMS

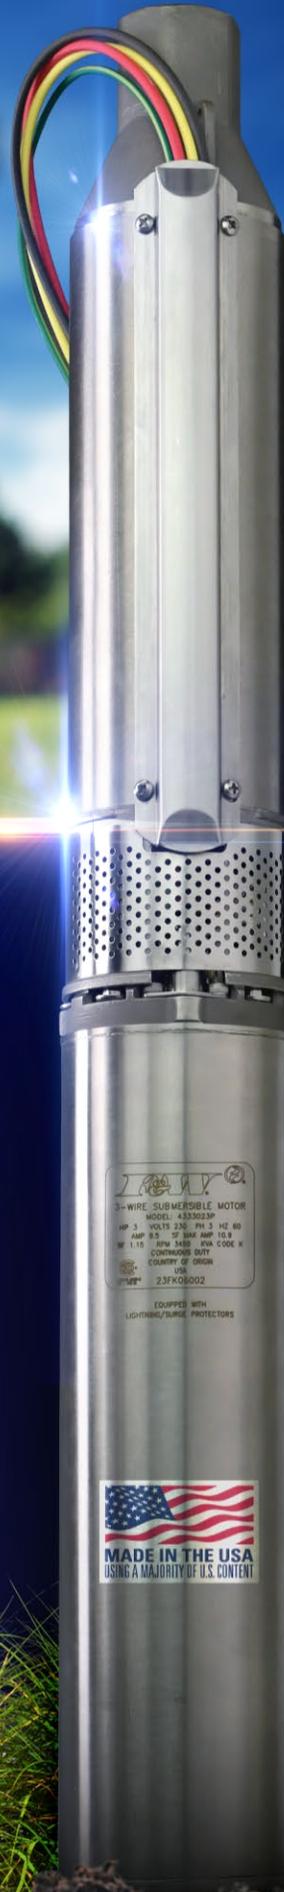

## 60HZ COMMANDER PRO15

GPM	HP	MODEL LIST	PRICE	SHIP WT.	Min. Tank Size (gal)
7	1.5	60TVS1507	\$5,540.00	53.0	4.0
10	1.5	60TVS1510	\$5,845.00	52.0	4.0
19	1.5	60TVS1519	\$5,452.00	54.0	4.0
27	1.5	60TVS1527	\$5,239.00	54.0	4.0

## 60HZ COMMANDER PRO20

GPM	HP	MODEL LIST	PRICE	SHIP WT.	Min. Tank Size (gal)
7	2	60TVS2007	\$6,010.00	66.0	4.0
10	2	60TVS2010	\$6,064.00	88.0	4.0
19	2	60TVS2019	\$5,675.00	87.0	8.0
27	2	60TVS2027	\$5,945.00	87.0	8.0
35	2	60TVS2035	\$5,945.00	87.0	8.0

## 60HZ COMMANDER PRO30

GPM	HP	MODEL LIST	PRICE	SHIP WT.	Min. Tank Size (gal)
10	3	60TVS3010	\$8,889.00	84.0	8.0
19	3	60TVS3019	\$8,176.00	82.0	8.0
27	3	60TVS3027	\$8,523.00	67.0	8.0
35	3	60TVS3035	\$8,523.00	65.0	8.0
55	3	60TVS3055	\$7,874.00	62.0	8.0

All prices in US dollars. Prices subject to change without notice.

Other questions? Let's talk.  
800.584.8089 or visit [FlintandWalling.com](http://FlintandWalling.com) to locate a distributor near you.



3-WIRE SUBMERSIBLE MOTOR  
MODEL: 4333023P  
HP: 3 VOLTS: 230 PH: 3 HZ: 60  
AMP: 8.5 2" DIA: AMP: 10.9  
W: 1.10 RPM: 3450 IMA CODE: X  
CONTINUOUS DUTY  
COUNTRY OF ORIGIN: USA  
P/N: 23FX03002  
EQUIPPED WITH LIGHTNING/SURGE PROTECTORS



**⚠ WARNING ELECTRICAL SHOCK HAZARD. DISCONNECT POWER BEFORE REMOVING COVER.**  
Allow 10 minutes for dangerous voltage to discharge before servicing.  
**FAILURE TO COMPLY COULD RESULT IN DEATH OR SERIOUS INJURY.**

**⚠ AVERTISSEMENT RISQUE DE CHOC ELECTRIQUE. DESCONNECTEZ L'ALIMENTATION AVANT DE RETIRER LE COUVERCLE.**  
Laissez les tensions dangereuses se décharger pendant 10 minutes avant d'effectuer l'entretien.  
**NE PAS REJECTER CES CONDITIONS PEUT ENTRAINER DES BLESSURES GRAVES OU LA MORT.**

**⚠ ADVERTENCIA SOBRE PELIGRO DE DESCARGA ELECTRICA. DESCONECTE LA ALIMENTACION ANTES DE RETIRAR LA CUBIERTA.**  
Deje pasar 10 minutos para que las voltajes peligrosos se descarguen antes de mantenimiento.  
**EL INCUMPLIMIENTO DE ESTAS CONDICIONES PODRIA PROVOCAR LESIONES GRAVES O LA MUERTE.**

# VARIABLE FREQUENCY DRIVE PACKAGE SYSTEMS

Shrouded venting for superior cooling

Key hole mount for fast, easy installation

Metal shielding, in conjunction with filtering, facilitates meeting FCC Part 15 Class A requirement

Stored memory for effective troubleshooting analysis

Spacious wiring area for easy installation

Heat baffle design efficiently directs air flow to maximize cooling for longer electronic component life.

Bottom and side knockouts support 3/4" and 1" conduit

Compatible with all 3 wire single phase and 3 wire three phase motors

Additional holes for easy mounting on studs, poles, etc. with easy-access hardware

Heat baffle design efficiently directs air flow to maximize cooling for longer electronic component life.

## GROUNDWATER SUPPORT TEAM



Status indication in easy-to-understand text (not codes)

Easy to use programming buttons



Call  
1.800.628.2313 or 1.260.599.8345

Email  
GWTech@FlintAndWalling.com

